

Smooth pine decking with a 4mm arris edge for exterior above ground use.

Made from sustainably sourced high-density Radiata timber, our decking features a smooth surface and subtle 4mm arris. It is the perfect solution for both residential and commercial outdoor above ground decking areas.

KEY FEATURES

Smooth & Simple Finish

Smooth surface enhances the natural grain for a simple, clean look

Subtle 4mm Arris Edge

Offers a crisp edge with minimal rounding, adding a touch of definition

Durability

Pine stands up well to outdoor elements and takes finishes easily

OTHER USES

Fencing & gates
Steps
Doors
Exterior joinery & furniture

TIPS & MAINTENANCE


Drying & acclimation: CCA-treated timber will shrink after treatment and must be re-dried. This is particularly important with decking as shrinkage will lead to a gap developing between the boards. Timber must be properly dried and acclimatised to location. On a sunny aspect, installation should be done on a hot dry day and the material immediately oiled or sealed with an oil-based water repellent sealer.

Finishing: The decking can be left uncoated, oiled, or fully sealed. However, uncoated surfaces may crack and weather over time.

Fastening recommendations: Use corrosion-resistant fasteners, such as stainless steel or coated, to avoid rust stains and ensure long-lasting security. Screws are better than nails. If using screws, they must be ring-shanked & passivated.

Proper penetration: Ensure nails and screws penetrate the bearer material at least the thickness of the deckboard.

Bearer spacing: For load-bearing decks using 21mm material, position bearers a maximum of 400mm apart to maintain stability and support. In heavy traffic areas, reduce to 300mm.

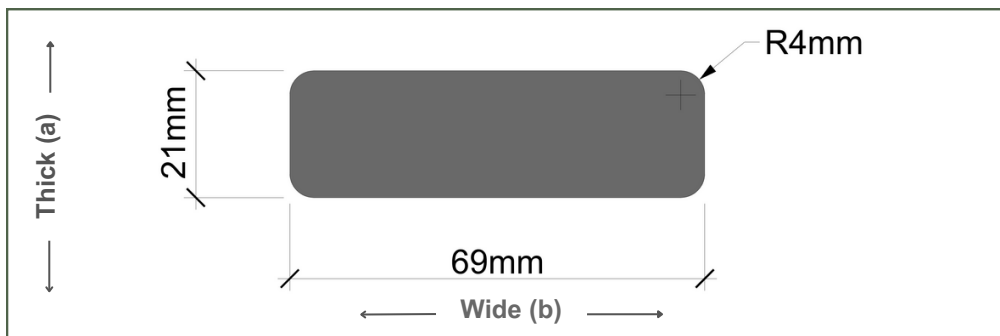

PRODUCT CODE	THICK mm (a)	WIDE mm (b)	LENGTHS
DSA021069/UT/TT	21	69	1.2m, 1.5m, 1.8m, 2.1m, 2.4m, 2.7m & 3.0m
DSAO21096/UT/TT	21	96	1.2m, 1.5m, 1.8m, 2.1m, 2.4m,
DSA021105/UT/TT	21	105	2.7m, 3.0m, 3.6m, 4.2m &
DSA021140/UT/TT	21	140	4.8m

PRODUCT SPECIFICATIONS

*** When treated (TT) CCA H3 Exterior above ground:** CCA is a water borne inorganic formulation, vacuum pressure impregnated into the wood for long term protection against wood borer, termites and wood decay. Geelhoutvlei Timbers uses the world famous TANALITH® C brand.

Untreated Timber (UT) requires proper sealing or finishing to protect against moisture, wear, and environmental factors. Failure to treat may result in warping, cracking, or damage over time.

Moisture content: Kiln-dried to 12-14%

Packaging: Packed in bundles of 10