



GEELHOUTVLEI

PRODUCT DATASHEET

PAR Planed All Round



PAR (Planed All Round) pine timber offers a smooth, versatile finish suitable for a wide range of indoor and outdoor applications (when treated).

Made exclusively from sustainably sourced, high-density appearance grade Radiata timber. It features a uniform surface, suitable for projects that demand a smooth look and reliable performance, from shelving and joinery to fencing and decorative trim.

KEY FEATURES

Smooth & Consistent Finish

Planed for a smooth surface, ideal for projects requiring a finished appearance

Versatile & Customisable

Suitable for a wide range of applications and easy to cut, shape, or finish to meet specific project needs

Reliable

Strong and stable timber that withstands indoor and outdoor conditions

Durability

High-density, slow-grown Southern Cape Radiata Pine


OTHER USES

Joinery & Cabinet work

Shelving

Architraves & Cover strips

Fencing

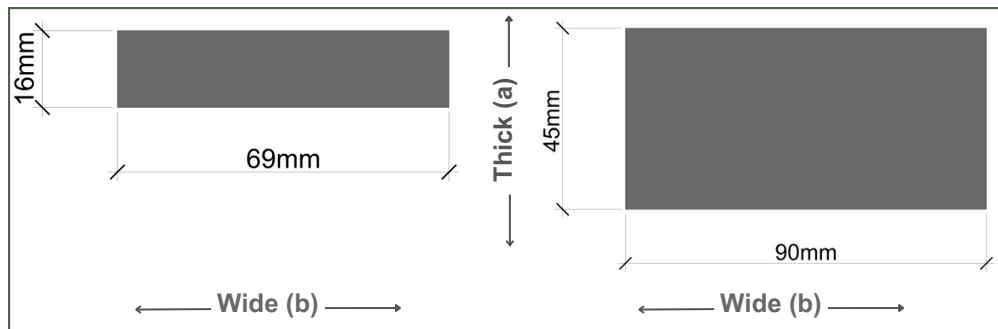

TIPS & MAINTENANCE

Allow to acclimate: Let the PAR timber acclimate to the environment where it will be installed for at least 48-72 hours. For indoor use, this helps the wood adjust to room temperature and humidity, reducing the risk of movement or warping. For outdoor projects, store the wood in a covered, well-ventilated area on-site to stabilize it to local moisture levels before installation.

Finishing: For a clean finish, sand thoroughly, then oil or seal directly after sanding to protect it from moisture and dirt.

Store flat & dry: Store unused PAR timber flat in a dry, shaded area to prevent bowing or twisting. Keep it off the ground using spacers or battens.

PRODUCT SPECIFICATIONS

*** When treated (TT) CCA H3 Exterior above ground:** CCA is a water borne inorganic formulation, vacuum pressure impregnated into the wood for long term protection against wood borer, termites and wood decay. Geelhoutvlei Timbers uses the world famous TANALITH® C brand.

PRODUCT CODE	THICK mm (a)	WIDE mm (b)	LENGTHS
PAR016069/UT/TT	16	69	1.2m, 1.5m, 1.8m, 2.1m, 2.4m, 2.7m & 3.0m
PAR016096/UT/TT	16	96	
PAR021045/UT/TT	21	45	1.2m, 1.5m, 1.8m, 2.1m, 2.4m, 2.7m, 3.0m, 3.6m & 4.2m
PAR021069/UT/TT	21	69	
PAR021096/UT/TT	21	96	
PAR021145/UT/TT	21	145	
PAR032069/UT/TT	32	69	
PAR045096/UT/TT	45	90	
PAR045145/UT/TT	45	145	

Also available as untreated (UT): Untreated timber requires proper sealing or finishing to protect against moisture, wear, and environmental factors. Failure to treat may result in warping, cracking, or damage over time.

Moisture Content: Kiln-dried to 12-14%

Packaging: Packed in bundles of 10

7 Passes Road, Karatara

sales@geelhoutvlei.co.za

+2744 356 2644

www.geelhoutvlei.co.za

DISCLAIMER: Please note that timber is an organic product and as such, prone to movement, weathering and eventual decay. Geelhoutvlei Timbers cc © makes no claim whatsoever as to its suitability for any purpose. Customers must satisfy themselves as to what they are purchasing, as all risk in the product will be transferred to them on their taking possession of it.