

PICKETS

with 10mm Bullnose

Picket fence palings are ideal for creating traditional & custom gates or fences, offering the flexibility to build to exact specifications

Made from sustainably sourced, high-density Radiata timber, these individually crafted palings bring a traditional look to gardens and can be tailored to various heights, styles, and finishes to complement any setting. Ideal for dedicated pet and non-pet areas, and safety fences around pools, decks etc

KEY FEATURES

Classic charm

Adds character and charm that blend beautifully into any landscape

Durable & Weather-Resistant

High-density, slow-grown Southern Cape Radiata Pine. The pointed top is functional as it reduces water build-up and future decay

Sturdy & Secure

Robust 21mm thickness providing secure, pet-friendly barriers

Versatile

Easily stained, painted, or left natural to fit any design



OTHER USES

Fencing
Gates
Balustrades


TIPS & MAINTENANCE

Drying & acclimation: CCA-treated timber will shrink after treatment and must be re-dried. Timber must be properly dried and acclimatised to location. On a sunny aspect, installation should be done on a hot dry day and the material immediately oiled or sealed with an oil-based water repellent sealer.

Finishing: The palings can be left uncoated, oiled, or fully sealed. However, uncoated surfaces will crack and weather over time.

Fastening recommendations: Use corrosion-resistant fasteners, such as stainless steel or coated nails, to avoid rust stains and ensure long-lasting security. Screws are better than nails. If using screws, they must be ring-shanked & passivated.

Proper penetration: Ensure nails and screws penetrate the bearer material at least the thickness of the paling.

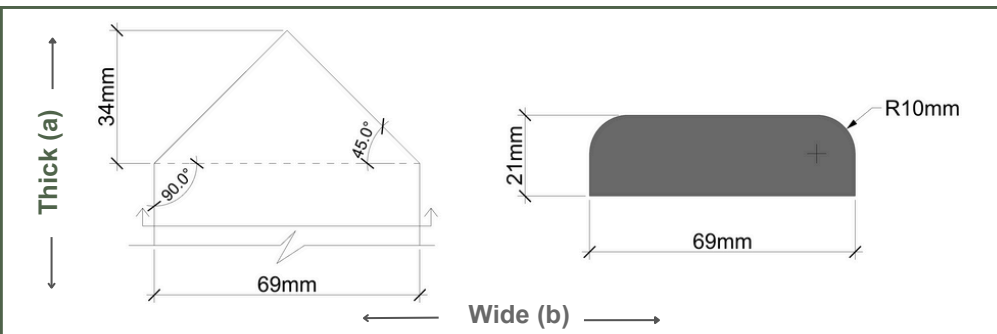

PRODUCT CODE	THICK mm (a)	WIDE mm (b)	LENGTHS
PB021069/TT	21	69	0.6m, 0.9m, 1.2m, 1.5m & 1.8m
PB021096/TT	21	96	

PRODUCT SPECIFICATIONS

Treatment (TT) CCA H3 Exterior above ground: CCA is a water borne inorganic formulation, vacuum pressure impregnated into the wood for long term protection against wood borer, termites and wood decay. Geelhoutvlei Timbers uses the world famous TANALITH® C brand.

Moisture content: Kiln-dried to 12-14%

Packaging: Packed in bundles of 10