

SKIRTING Standard

INTERIOR

Standard skirting gives a classic, clean look that complements any room.

Manufactured exclusively from appearance grade sustainably sourced Radiata timber and precision-milled for a smooth finish, our Standard Skirting features a standard profile suitable for both traditional and modern interiors and can be painted, stained or sealed to match any interior style.

KEY FEATURES

Classic Style

A simple, classic profile that fits with any design style

Clean Design

Complements a variety of interior styles, from traditional to modern

Versatile Finish Options

Can be painted, stained, or sealed to suit any interior style

Durability

Made from sustainably sourced pine for long-lasting performance and resistance to wear



OTHER USES

Architraves

Dado and picture rails


TIPS & MAINTENANCE

Allow the wood to acclimate: Before installation, let the skirting acclimate to room temperature and humidity for at least 48-72 hours to prevent warping or gaps.

Fastening to masonry: Countersink screws into the skirting and use Rawl plugs for a sturdy fix. To conceal screw holes, cut plugs from offcuts using a plug cutter and secure them over the countersunk screws.

Fastening to timber: Brad nails are an efficient option for attaching skirting in timber constructions.

Finish: Sand thoroughly, then oil, seal, or paint immediately after sanding. If painting, apply a wood primer first for better adhesion and durability.

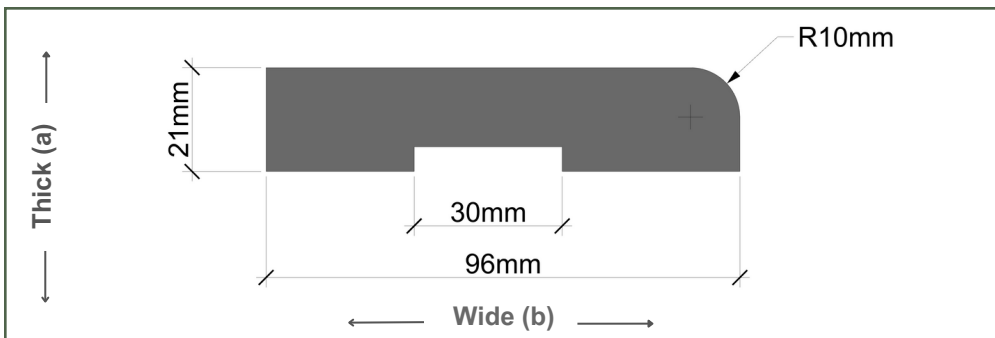

PRODUCT CODE	THICK mm (a)	WIDE mm (b)	LENGTHS
SS021069/UT	21	69	3.0m, 3.6m, 4.2m & 4.8m
SS021096/UT	21	96	
SS021140/UT	21	140	

PRODUCT SPECIFICATIONS

Untreated timber (UT) requires proper sealing or finishing to protect against moisture, wear, and environmental factors. Failure to seal may result in warping, cracking, or damage over time.

Moisture Content: Kiln-dried to 12-14%

Packaging: Packed in bundles of 10